




Comhairle Cathrach Chorcaí Cork City Council

Halla na Cathrach, Corcaigh - City Hall, Cork - T12 T997



01/07/2026

RE: Section 5 Declaration R1005/25 The Bungalow, Ballinure Road, Mahon, T12 TE2P

A Chara,

With reference to your request for a Section 5 Declaration at the above-named property, received on 24th of November, 2025.

The Question before the Planning Authority was whether the construction of a single storey rear extension to the existing dwelling house is development and, if so, is it exempted development?

1. Development

The first issue for consideration is whether or not the matter at hand is *'development'*, which is defined in the Act as comprising two chief components: *'works'* and / or *'any material change in the use of any structures or other land'*.

'Works' is defined in section 3(1) of the Act as including *'any act or operation of construction, excavation, demolition, extension, alteration, repair or renewal'*.

With regard to the proposed development, it is considered that the construction of the rear extension constitutes *'works'* as it comprises the alteration to a building on the site. As the proposal comprises *'works'*, it is clearly therefore *'development'* within the meaning of the Act.

Therefore, as the proposal comprises *'works'*, it is clearly therefore *'development'* within the meaning of the Act.



We are Cork.



Comhairle Cathrach Chorcaí

Cork City Council

Halla na Cathrach, Corcaigh - City Hall, Cork - T12 T997

2. Exempted Development

The next issue for consideration is whether or not the matter at hand is exempted development. Section 2(1) of the Act defines 'exempted development' as having 'the meaning specified in section 4' of the Act (which relates to exempted development).

Section 4(3) of the Act states that exempted development either means development specified in section 4(1) or development which is exempted development having regard to any regulations under section 4(2).

With regard to the proposed development, "*the construction of a single storey extension to rear of dwelling house*", it is considered that article 6 and **Class 1** applies, as it is an extension of a house by the construction of an extension to the rear of the house.

Having assessed the proposed extension against Class 1 and its conditions and limitations the following is found:

Condition / Limitation 1

The house, from reviewing planning history, has not been previously extended. The proposed extension is approximately 40sqm in area and is a single storey extension. Therefore part (a) of this condition and limitation are satisfied (parts (b) and (c) do not apply).

Condition / Limitation 2

The house does not appear to have been previously extended therefore this condition/limitation does not apply.

Condition / Limitation 3

The proposed works are ground floor only therefore this condition/limitation does not apply.

Condition / Limitation 4

The height of the rear wall of the proposed extension contains a gable wall which exceeds the height of the rear wall of the house. Part (a) of this condition and limitation is not satisfied and, therefore, the proposed extension is not considered to be exempt.

The highest part of the roof of the proposed extension does not exceed the height of the highest part of the roof of the dwelling. Therefore part (c) of this condition and limitation are satisfied (part (b) does not apply).



We are Cork.



Comhairle Cathrach Chorcaí Cork City Council

Halla na Cathrach, Corcaigh - City Hall, Cork - T12 T997

Condition / Limitation 5

An approximate measurement indicates that more than 25m² of open space will remain to the rear of the dwelling.

Condition / Limitation 6

Ground floor windows proposed are more than 1 metre from the boundaries they face.

Condition / Limitation 7

It does not appear that the roof is proposed to be used as a balcony or roof terrace.

Restrictions on exemption

It is not considered that any apply in this instance.

In Conclusion, it is not exempted development

In view of the above and having regard to —

- Sections 2, 3, and 4 of the Planning and Development Act 2000 as amended, and
- Articles 6, 9 and 10 and Part 1 of Schedule 2 of the Planning and Development Regulations 2001 to 2018

the planning authority considers that —

the construction of a single storey rear extension to the existing dwelling house at The Bungalow, Ballinure Road, Mahon, Cork, T12 TE2P **IS DEVELOPMENT and IS NOT EXEMPTED DEVELOPMENT** (due to the height of the rear wall of the proposed extension containing a gable wall which exceeds the height of the rear wall of the house - Condition/Limitation 4 - Part (a))



We are Cork.



Comhairle Cathrach Chorcaí Cork City Council

Halla na Cathrach, Corcaigh - City Hall, Cork - T12 T997

Under Section 5(3)(a) of the Planning and Development Act, 2000, you may, on payment of the appropriate fee, refer this declaration for review by An Coimisiún Pleanála within 4 weeks of the date it is issued; the 07th of January, 2026.

Is mise le meas,

Anthony Angelini

Anthony Angelini
Assistant Staff Officer
Planning & Integrated Development
Cork City Council



We are Cork.

PLANNER'S REPORT
Ref. R 1005/25

Cork City
Council
Development Management
Planning and Integrated
Development

Application type	SECTION 5 DECLARATION
Question	<i>Is the construction of a single storey rear extension to the existing dwelling house development and, if so, is it exempted development?</i>
Location	The Bungalow, Ballinure Road, Mahon, Cork, T12 TE2P
Applicant	James Corcoran (owner)
Date	24/02/2026
Recommendation	Is development and is not exempted development

INTERPRETATION

In this report '*the Act*' means the Planning and Development Act, 2000 as amended and '*the Regulations*' means the Planning and Development Regulations, 2001 as amended, unless otherwise indicated.

1. REQUIREMENTS FOR A SECTION 5 DECLARATION APPLICATION

Section 5(1) of the Planning and Development Act 2000 as amended states,

5.—(1) If any question arises as to what, in any particular case, is or is not development or is or is not exempted development within the meaning of this Act, any person may, on payment of the prescribed fee, request in writing from the relevant planning authority a declaration on that question, and that person shall provide to the planning authority any information necessary to enable the authority to make its decision on the matter.

The requirements for making a section 5 declaration are set out in the Act.

2. THE QUESTION BEFORE THE PLANNING AUTHORITY

The question to the planning authority is framed using the phrasing of section 5. The applicant states in the request, "*Is the construction of a single storey rear extension to the existing dwelling house at The Bungalow, Ballinure Road, Mahon an exempted development?*"

It is considered that the intention of the request is clear, and that it is entirely reasonable to consider the question before the planning authority as being:

Is the construction of a single storey rear extension to the existing dwelling house development and, if so, is it exempted development?

3. SITE DESCRIPTION

The subject property is a single storey, detached dwelling in the Sustainable Residential Neighbourhoods zoning area. The area is predominantly residential in nature.

4. DESCRIPTION OF THE DEVELOPMENT

The proposed development proposes the construction of new rear extension to an existing dwelling house.

5. RELEVANT PLANNING HISTORY

None.

6. LEGISLATIVE PROVISIONS

6.1 Planning and Development Act, 2000 as amended

Section 2(1)

“exempted development” has the meaning specified in section 4.

“structure” means any building, structure, excavation, or other thing constructed or made on, in or under any land, or any part of a structure so defined, and—

- (a) where the context so admits, includes the land on, in or under which the structure is situate, and*
- (b) in relation to a protected structure or proposed protected structure, includes—*
 - (i) the interior of the structure,*
 - (ii) the land lying within the curtilage of the structure,*
 - (iii) any other structures lying within that curtilage and their interiors, and*
 - (iv) all fixtures and features which form part of the interior or exterior of any structure or structures referred to in subparagraph (i) or (iii).*

“works” includes any act or operation of construction, excavation, demolition, extension, alteration, repair or renewal and, in relation to a protected structure or proposed protected structure, includes any act or operation involving the application or removal of plaster, paint, wallpaper, tiles or other material to or from the surfaces of the interior or exterior of a structure.

Section 3(1)

In this Act, “development” means, except where the context otherwise requires, the carrying out of any works on, in, over or under land or the making of any material change in the use of any structures or other land.

Section 4(1)(h)

4.(1) The following shall be exempted developments for the purposes of this Act—

...

(h) development consisting of the carrying out of works for the maintenance, improvement or other alteration of any structure, being works which affect only the interior of the structure or which do not materially affect the external appearance of the structure so as to render the appearance inconsistent with the character of the structure or of neighbouring structures;

Section 4(2)

Section 4(2) provides that the Minister may, by regulations, provide for any class of development to be exempted development. The principal regulations made under this provision are the Planning and Development Regulations 2001, as amended.

Section 4(3)

A reference in this Act to exempted development shall be construed as a reference to development which is—

- (a) any of the developments specified in subsection (1), or
- (b) development which, having regard to any regulations under subsection (2), is exempted development for the purposes of this Act.

Section 5(1)

See section 1 of this report.

6.2 Planning and Development Regulations 2001 to 2018 as amended

Article 5(2)

In Schedule 2, unless the context otherwise requires, any reference to the height of a structure, plant or machinery shall be construed as a reference to its height when measured from ground level, and for that purpose “ground level” means the level of the ground immediately adjacent to the structure, plant or machinery or, where the level of the ground where it is situated or is to be situated is not uniform, the level of the lowest part of the ground adjacent to it.

Article 6(1)

Subject to article 9, development of a class specified in column 1 of Part 1 of Schedule 2 shall be exempted development for the purposes of the Act, provided that such development complies with the conditions and limitations specified in column 2 of the said Part 1 opposite the mention of that class in the said column 1.

Article 9

Article 9 sets out restrictions on exemptions specified under article 6.

(Article 6) Schedule 2, Part 1, Class 1

Classes 1-8 relate to development within the curtilage of a house and Class 1 relates to “the extension of a house, by the construction or erection of an extension (including a conservatory) to the rear of the house or by the conversion for use as part of the house of any garage, store, shed or other similar structure attached to the rear or to the side of the house”.

Schedule 2, Part 1, Class 1

Exempted Development — General

Column 1 Description of Development	Column 2 Conditions and Limitations
<p><i>Development within the curtilage of a house</i></p> <p>CLASS 1 <i>The extension of a house, by the construction or erection of an extension (including a conservatory) to the rear of the house or by the conversion for use as part of the house of any garage, store, shed or other similar</i></p>	<p>1. (a) <i>Where the house has not been extended previously, the floor area of any such extension shall not exceed 40 square metres.</i></p> <p>(b) <i>Subject to paragraph (a), where the house is terraced or semi-detached, the floor area of any extension above ground level shall not exceed 12 square metres.</i></p>

Column 1 Description of Development	Column 2 Conditions and Limitations
<p><i>structure attached to the rear or to the side of the house.</i></p>	<p>(c) <i>Subject to paragraph (a), where the house is detached, the floor area of any extension above ground level shall not exceed 20 square metres.</i></p> <p>2. (a) <i>Where the house has been extended previously, the floor area of any such extension, taken together with the floor area of any previous extension or extensions constructed or erected after 1 October 1964, including those for which planning permission has been obtained, shall not exceed 40 square metres.</i></p> <p>(b) <i>Subject to paragraph (a), where the house is terraced or semi-detached and has been extended previously, the floor area of any extension above ground level taken together with the floor area of any previous extension or extensions above ground level constructed or erected after 1 October 1964, including those for which planning permission has been obtained, shall not exceed 12 square metres.</i></p> <p>(c) <i>Subject to paragraph (a), where the house is detached and has been extended previously, the floor area of any extension above ground level, taken together with the floor area of any previous extension or extensions above ground level constructed or erected after 1 October 1964, including those for which planning permission has been obtained, shall not exceed 20 square metres.</i></p> <p>3. <i>Any above ground floor extension shall be a distance of not less than 2 metres from any party boundary.</i></p> <p>4. (a) <i>Where the rear wall of the house does not include a gable, the height of the walls of any such extension shall not exceed the height of the rear wall of the house.</i></p> <p>(b) <i>Where the rear wall of the house includes a gable, the height of the walls of any such extension shall not exceed the height of the side walls of the house.</i></p> <p>(c) <i>The height of the highest part of the roof of any such extension shall not exceed, in the case of a flat roofed extension, the height of the eaves or parapet, as may be appropriate, or, in any</i></p>

Column 1 Description of Development	Column 2 Conditions and Limitations
	<p><i>other case, shall not exceed the height of the highest part of the roof of the dwelling.</i></p> <p>5. <i>The construction or erection of any such extension to the rear of the house shall not reduce the area of private open space, reserved exclusively for the use of the occupants of the house, to the rear of the house to less than 25 square metres.</i></p> <p>6. (a) <i>Any window proposed at ground level in any such extension shall not be less than 1 metre from the boundary it faces.</i></p> <p>(b) <i>Any window proposed above ground level in any such extension shall not be less than 11 metres from the boundary it faces.</i></p> <p>(c) <i>Where the house is detached and the floor area of the extension above ground level exceeds 12 square metres, any window proposed at above ground level shall not be less than 11 metres from the boundary it faces.</i></p> <p>7. <i>The roof of any extension shall not be used as a balcony or roof garden.</i></p>

7. ASSESSMENT

7.1 Development

The first issue for consideration is whether or not the matter at hand is ‘development’, which is defined in the Act as comprising two chief components: ‘works’ and / or ‘any material change in the use of any structures or other land’.

‘Works’ is defined in section 3(1) of the Act as including ‘any act or operation of construction, excavation, demolition, extension, alteration, repair or renewal’.

With regard to the proposed development, it is considered that the construction of the rear extension constitutes ‘works’ as it comprises the alteration to a building on the site. As the proposal comprises ‘works’, it is clearly therefore ‘development’ within the meaning of the Act.

Therefore, as the proposal comprises ‘works’, it is clearly therefore ‘development’ within the meaning of the Act.

CONCLUSION
Is development

7.2 Exempted development

The next issue for consideration is whether or not the matter at hand is exempted development. Section 2(1) of the Act defines ‘exempted development’ as having ‘the meaning specified in section 4’ of the Act (which relates to exempted development).

Section 4(3) of the Act states that exempted development either means development specified in section 4(1) or development which is exempted development having regard to any regulations under section 4(2).

With regard to the proposed development, “*the construction of a single storey extension to rear of dwelling house*”, it is considered that article 6 and **Class 1** applies, as it is an extension of a house by the construction of an extension to the rear of the house.

Having assessed the proposed extension against Class 1 and its conditions and limitations the following is found:

Condition / Limitation 1

The house, from reviewing planning history, has not been previously extended. The proposed extension is approximately 40sqm in area and is a single storey extension. Therefore part (a) of this condition and limitation are satisfied (parts (b) and (c) do not apply).

Condition / Limitation 2

The house does not appear to have been previously extended therefore this condition/limitation does not apply.

Condition / Limitation 3

The proposed works are ground floor only therefore this condition/limitation does not apply.

Condition / Limitation 4

The height of the rear wall of the proposed extension contains a gable wall which exceeds the height of the rear wall of the house. Part (a) of this condition and limitation is not satisfied and, therefore, the proposed extension is not considered to be exempt.

The highest part of the roof of the proposed extension does not exceed the height of the highest part of the roof of the dwelling. Therefore part (c) of this condition and limitation are satisfied (part (b) does not apply).

Condition / Limitation 5

An approximate measurement indicates that more than 25m² of open space will remain to the rear of the dwelling.

Condition / Limitation 6

Ground floor windows proposed are more than 1 metre from the boundaries they face.

Condition / Limitation 7

It does not appear that the roof is proposed to be used as a balcony or roof terrace.

Restrictions on exemption

It is not considered that any apply in this instance.

CONCLUSION

Is not exempted development

8. ENVIRONMENTAL ASSESSMENT

The provisions of sections 4(4), 4(4A) and 177U(9) of the Act are noted which state,

Section 4(4),

Notwithstanding paragraphs (a), (i), (ia) and (l) of subsection (1) and any regulations under subsection (2), development shall not be exempted development if an environmental impact assessment or an appropriate assessment of the development is required.

Section 4(4A)

Notwithstanding subsection (4), the Minister may make regulations prescribing development or any class of development that is—

(a) authorised, or required to be authorised by or under any statute (other than this Act) whether by means of a licence, consent, approval or otherwise, and

(b) as respects which an environmental impact assessment or an appropriate assessment is required,

to be exempted development.

Section 177U(9)

In deciding upon a declaration or a referral under section 5 of this Act a planning authority or the Board, as the case may be, shall where appropriate, conduct a screening for appropriate assessment in accordance with the provisions of this section.

8.1 Screening for Environmental Impact Assessment

Having regard to the contents of Article 103 and Schedule 7 of the Planning and Development Regulations 2001, as amended it is considered that the proposed development by reason of its nature, scale and location would not be likely to have significant effects on the environment. Accordingly it is considered that **environmental impact assessment is not required.**

8.2 Screening for Appropriate Assessment

The applicant has not submitted an appropriate assessment screening report. The relevant European sites are the Cork Harbour SPA (site code 004030) and the Great Island Channel cSAC (site code 001058). Having regard to the location of the proposed development site relative to these European sites and related watercourses and to the nature and scale of the proposed development it is considered that the proposed development would not affect the integrity of these European sites. Accordingly it is considered that **appropriate assessment is not required.**

9. RECOMMENDATION

In view of the above and having regard to —

- Sections 2, 3, and 4 of the Planning and Development Act 2000 as amended, and
- Articles 6, 9 and 10 and Part 1 of Schedule 2 of the Planning and Development Regulations 2001 to 2018

the planning authority considers that —

the construction of a single storey rear extension to the existing dwelling house at The Bungalow, Ballinure Road, Mahon, Cork, T12 TE2P **IS DEVELOPMENT** and **IS NOT EXEMPTED DEVELOPMENT** (due to the height of the rear wall of the proposed extension containing a gable wall which exceeds the height of the rear wall of the house - Condition/Limitation 4 - Part (a))



Eoin Cullinane
Executive Planner
17/12/2025

COMHAIRLE CATHRACH CHORCAÍ
CORK CITY COUNCIL

Community, Culture & Placemaking Directorate,
Cork City Council, City Hall, Anglesea Street, Cork.

R-Phost/E-Mail planning@corkcity.ie

Fón/Tel: 021-4924029

Líonra/Web: www.corkcity.ie

SECTION 5 DECLARATION APPLICATION FORM
under Section 5 of the Planning & Development Acts 2000 (as amended)

1. NAME OF PERSON MAKING THE REQUEST

James Corcoran

2. POSTAL ADDRESS OF LAND OR STRUCTURE FOR WHICH DECLARATION IS SOUGHT

The Bungalow, Ballinure Road, Mahon, T12 TE2P

3. QUESTION/ DECLARATION DETAILS

PLEASE STATE THE SPECIFIC QUESTION FOR WHICH A DECLARATION IS SOUGHT:

Sample Question: Is the construction of a shed at No 1 Wall St, Cork development and if so, is it exempted development?

Note: only works listed and described under this section will be assessed under the section 5 declaration.

Is the construction of a single storey rear extension to the existing dwelling house at The Bungalow, Ballinure Road, Mahon an exempted development?

ADDITIONAL DETAILS REGARDING QUESTION/ WORKS/ DEVELOPMENT:

(Use additional sheets if required).

The development consists of a single storey extension entirely to the rear of the existing dwelling.

Conventional construction of masonry walls and tiled roof to match the existing house.

Proposed gross internal floor area of the extension to be 40sq.m.

Please see maps and drawings attached

CORK CITY COUNCIL
PLANNING & DEVELOPMENT

25 NOV 2025

DEVELOPMENT MANAGEMENT

4. Are you aware of any enforcement proceedings connected to this site?
 If so please supply details: N/A

5. Is this a Protected Structure or within the curtilage of a Protected Structure? NO

If yes, has a Declaration under Section 57 of the Planning & Development Act 2000 been requested or issued for the property by the Planning Authority?

6. Was there previous relevant planning application/s on this site? NO
 If so please supply details:

7. APPLICATION DETAILS


Answer the following if applicable. Note: Floor areas are measured from the inside of the external walls and should be indicated in square meters (sq. M)

(a) Floor area of existing/proposed structure/s	40SQ.M.
(b) If a domestic extension, have any previous extensions/structures been erected at this location after 1 st October, 1964, (including those for which planning permission has been obtained)?	Yes <input type="checkbox"/> No <input checked="" type="checkbox"/> If yes, please provide floor areas. (sq m)
(c) If concerning a change of use of land and / or building(s), please state the following:	
Existing/ previous use (please circle)	Proposed/existing use (please circle)
N/A	N/A

7. LEGAL INTEREST

Please tick appropriate box to show applicant's legal interest in the land or structure	A. Owner <input checked="" type="checkbox"/>	B. Other <input type="checkbox"/>
Where legal interest is 'Other', please state your interest in the land/structure in question		
If you are not the legal owner, please state the name of the owner if available		


8. I / We confirm that the information contained in the application is true and accurate:

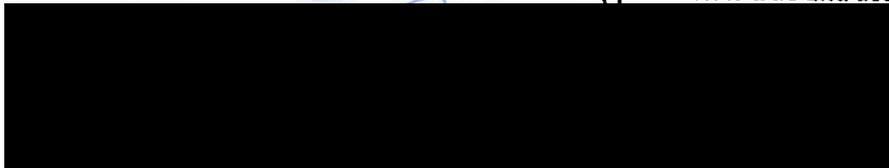

CONFIDENTIAL CONTACT DETAILS

These details will not be made available to the public.

9. Applicant:

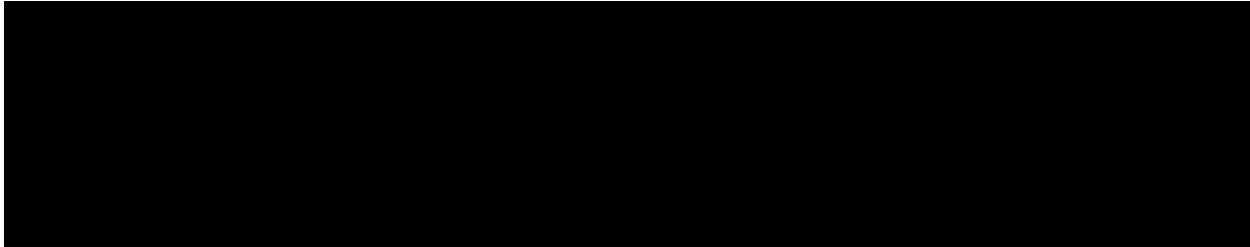

10. Person/Agent acting on behalf of the Applicant (if any):


Name(s):	N/A	
Address:		
Telephone:		
E-mail address:		
Should all correspondence be sent to the above address? (Please note that if the answer is 'No', all correspondence will be sent to the Applicant's address)	Yes <input type="checkbox"/>	No <input type="checkbox"/>

11. Owner Details (if the applicant above is not the legal owner):

Name(s)	N/A
Address	

12. ADDITIONAL CONTACT DETAILS

The provision of additional contact information such as email addresses or phone numbers is voluntary and will only be used by the Planning Authority to contact you should it be deemed necessary for the purposes of administering the application.

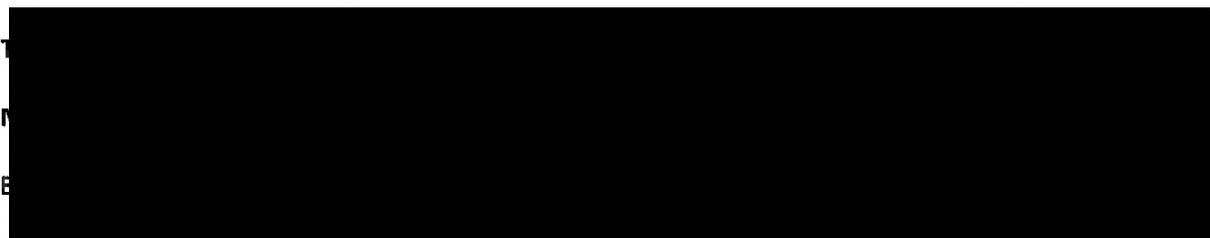

For Office Use Only:

File Ref. No. _____

ADVISORY NOTES:

The application must be accompanied by the required fee of €80. Payment may be made at the Cork City Council cash desk, by cheque, by telephone with a credit/debit card, or by electronic fund transfer.

The application should be accompanied by a site location map which is based on the Ordnance Survey map for the area, is a scale not less than 1:1000 and it shall clearly identify the site in question.

Sufficient information should be submitted to enable the Planning Authority to make a decision. If applicable, any plans submitted should be to scale and based on an accurate survey of the lands/structure in question.

The application should be sent to the following address:

**The Development Management Section, Community, Culture & Placemaking
Directorate, Cork City Council, City Hall, Anglesea Street, Cork.**

Please email planning@corkcity.ie with any queries.

- The Planning Authority may request other person(s) other than the applicant to submit information on the question which has arisen and on which the declaration is sought.
- Any person issued with a declaration may on payment to An Bord Pleanála refer a declaration for review by the Board within 4 weeks of the date of the issuing of the declaration.
- In the event that no declaration is issued by the Planning Authority, any person who made a request may on payment to the Board of such a fee as may be prescribed, refer the question for decision to the Board within 4 weeks of the date that a declaration was due to be issued by the Planning Authority.


The application form and advisory notes are non-statutory documents prepared by Cork City Council for the purpose of advising as to the type information is normally required to enable the Planning Authority to issue a declaration under Section 5. This document does not purport to be a legal interpretation of the statutory legislation nor does it state to be a legal requirement under the Planning and Development Act 2000 as amended, or Planning and Development Regulations 2001 as amended.

DATA PROTECTION


"Cork City Council is committed to fulfilling its obligations imposed by the Data Protection Acts 1988 to 2018 and the GDPR. Our privacy statement and data protections policy is available at <https://www.corkcity.ie/en/council-services/public-info/gdpr/>

We request that you read these as they contain important information about how we process personal data.

40SQ.M SINGLE STOREY
EXTENSION OUTLINED IN GREEN

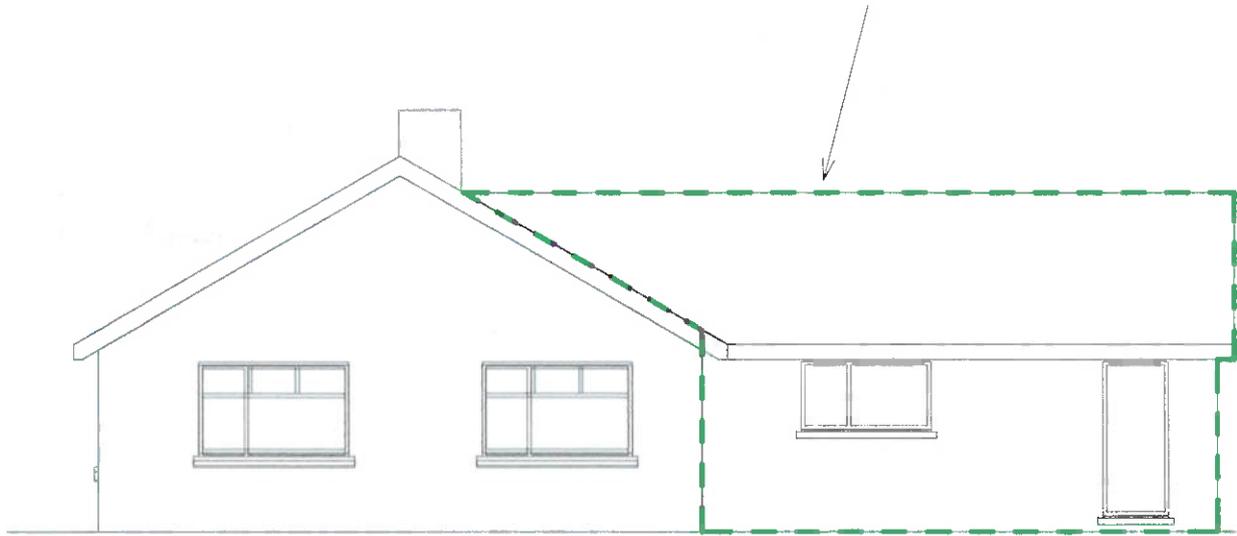


SOUTH ELEV. - PROPOSED
1 : 100

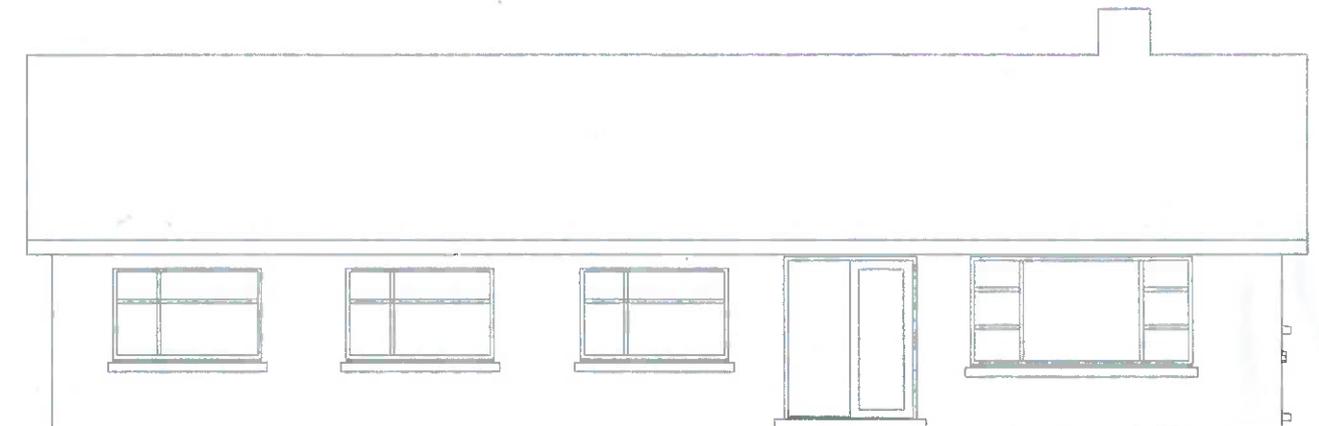

WEST ELEV. - PROPOSED
1 : 100

A	SECTION 5 APPLICATION	21/11/25
REV	DESCRIPTION	DATE
PROJECT: Proposed Extension to Existing Dwelling House at The Bungalow, Balinure Road, Mahon		
CLIENT: James Corcoran		
DRAWING NO.	202	REV. A
SCALE:	1 : 100	
DRAWING TITLE: S&W ELEVATIONS - PROPOSED		

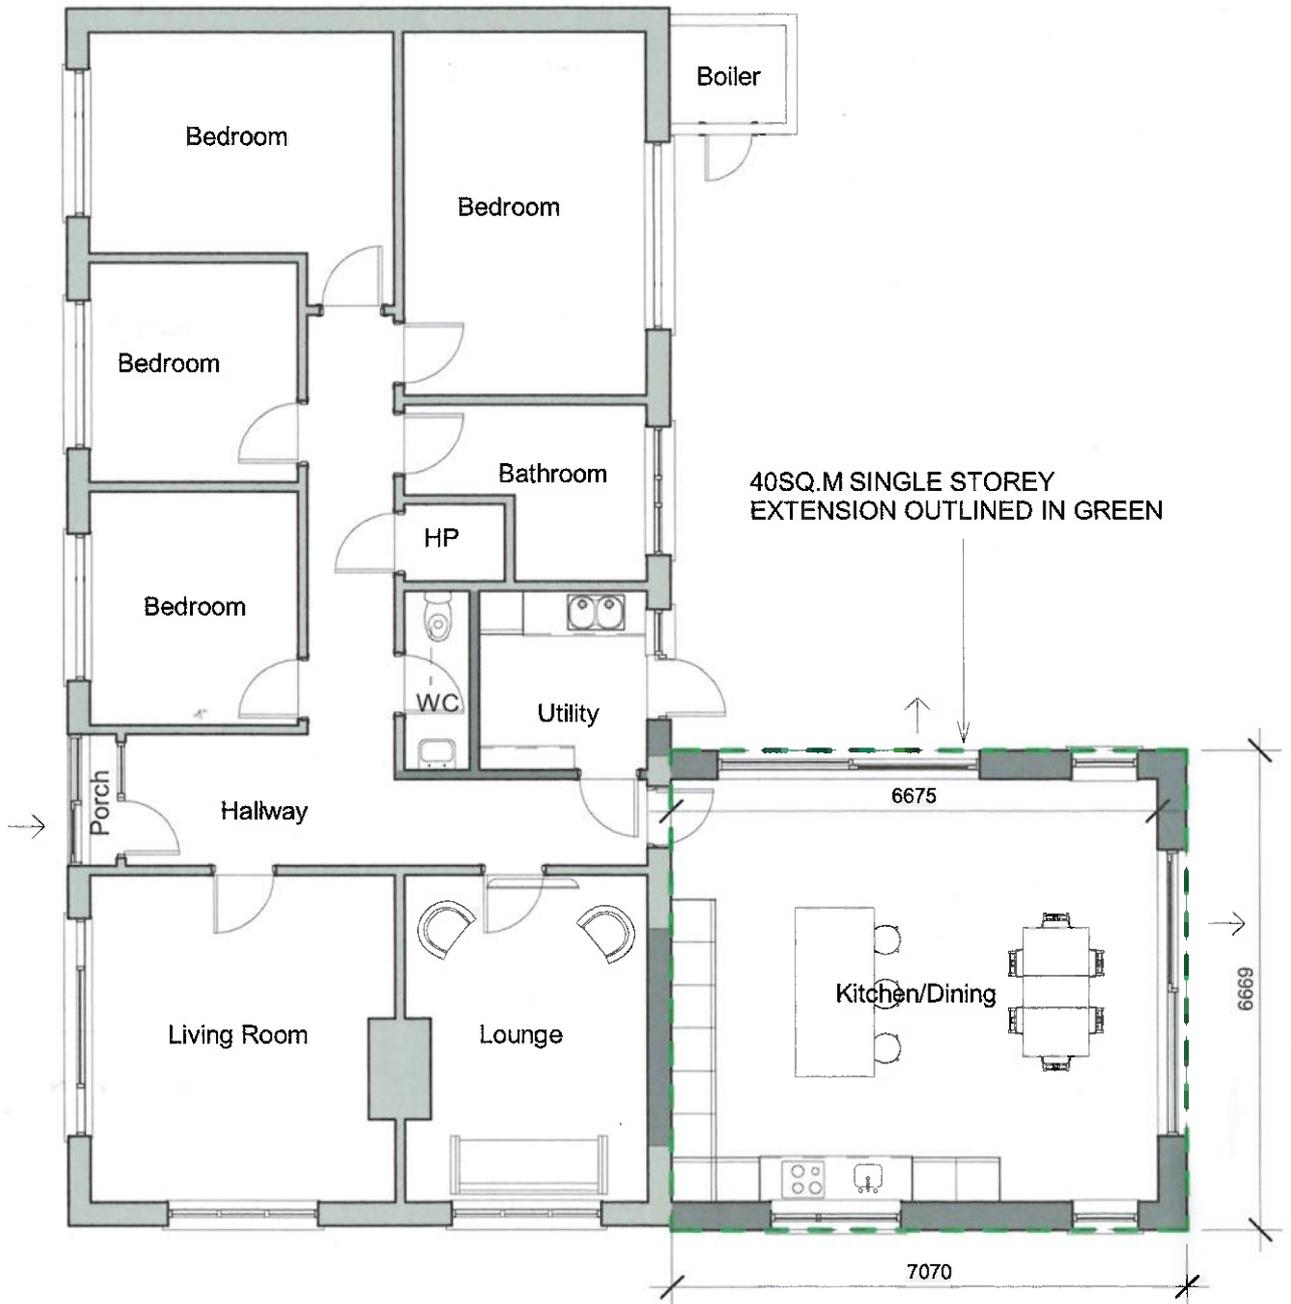


EXISTING FLOOR AREA	124sq.m
PROPOSED EXTENSION AREA	40sq.m
PROPOSED TOTAL FLOOR AREA	164sq.m

FLOOR PLAN - PROPOSED
1 : 100


A	SECTION 5 APPLICATION	21/11/25
REV	DESCRIPTION	DATE
PROJECT: Proposed Extension to Existing Dwelling House at The Bungalow, Ballinure Road, Mahon		
CLIENT: James Corcoran		
DRAWING NO.	101	REV. A
SCALE:	1 : 100	
DRAWING TITLE: Floor Plan - Proposed		

38SQ.M SINGLE STOREY
EXTENSION OUTLINED IN GREEN

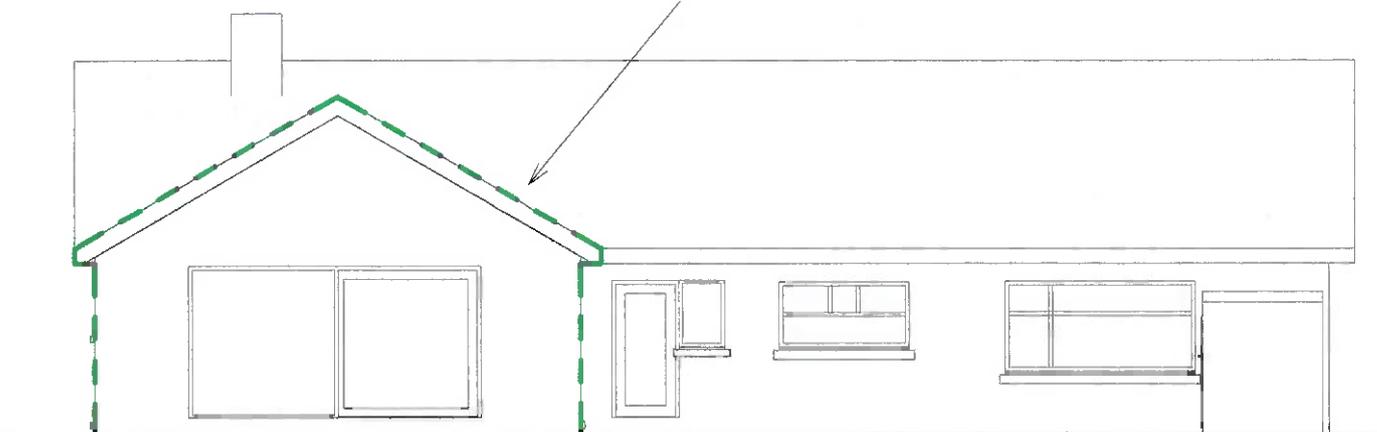

EAST ELEV. - PROPOSED
1 : 100

40SQ.M SINGLE STOREY
EXTENSION OUTLINED IN GREEN

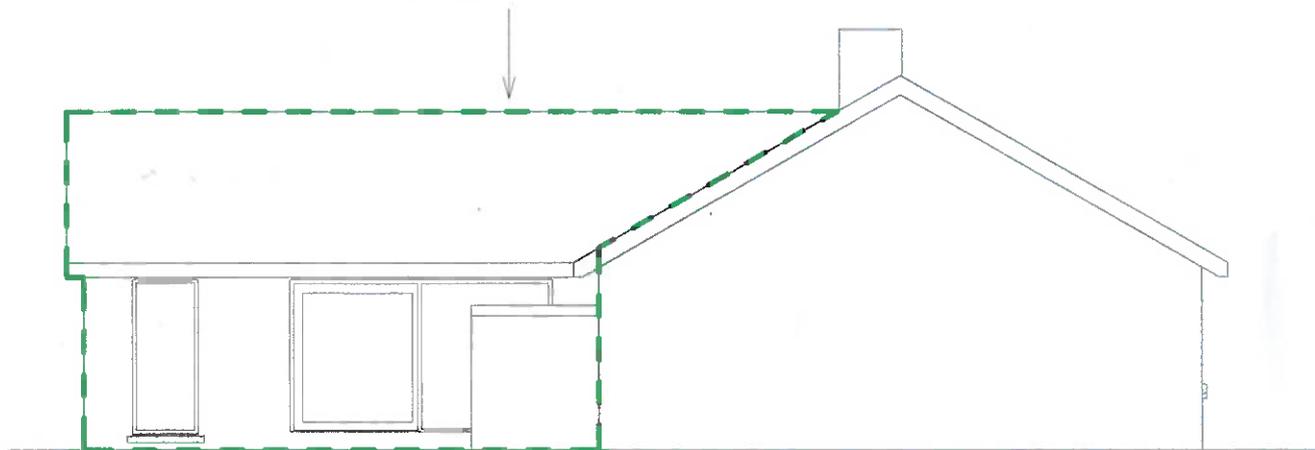

NORTH ELEV. - PROPOSED
1 : 100

A	SECTION 5 APPLICATION	21/11/25
REV	DESCRIPTION	DATE
PROJECT: Proposed Extension to Existing Dwelling House at The Bungalow, Ballinure Road, Mahon		
CLIENT: James Corcoran		
DRAWING NO.	201	REV. A
SCALE:	1 : 100	
DRAWING TITLE: N&E ELEVATIONS - PROPOSED		

Planning Pack Map



Tailte Éireann

CENTRE COORDINATES:
ITM 572004,571176

ORDER NO.:
50503826_1

MAP SERIES:
1:1,000 6383-15
1:1,000 6383-20
1:1,000 6384-11
1:1,000 6384-16

COMPILED AND PUBLISHED BY:
Tailte Éireann,
Phoenix Park,
Dublin 8,
Ireland.
D08F6E4

www.tailte.ie


Any unauthorised reproduction infringes Tailte Éireann copyright.

No part of this publication may be copied, reproduced or transmitted in any form or by any means without the prior written permission of the copyright owner.

The representation on this map of a road, track or footpath is not evidence of the existence of a right of way.

This topographic map does not show legal property boundaries, nor does it show ownership of physical features.

©Tailte Éireann, 2025.
All rights reserved.

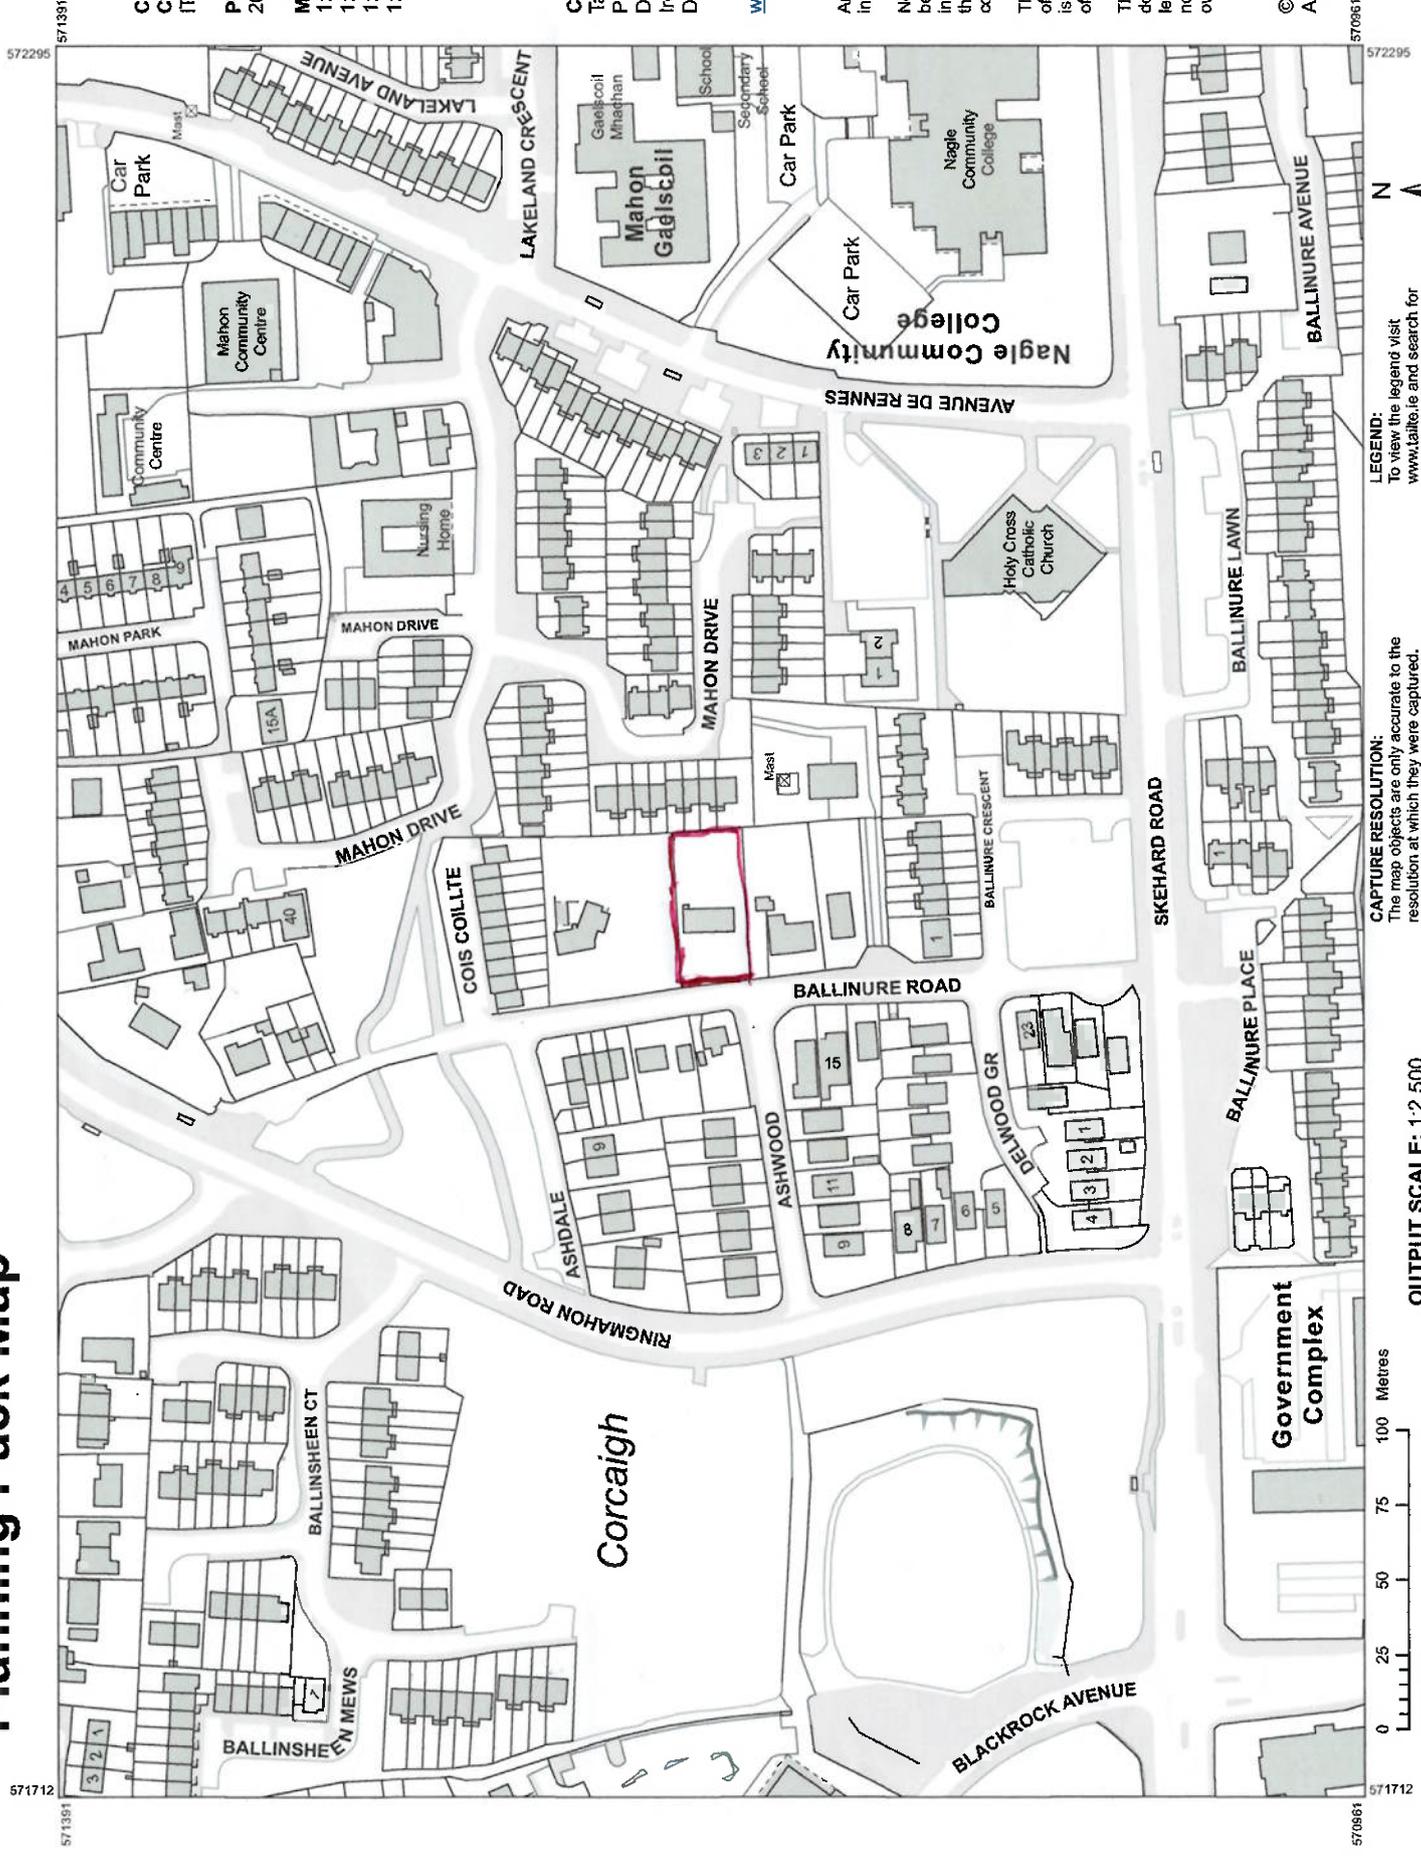

LEGEND:
To view the legend visit www.tailte.ie and search for 'Large Scale Legend'

CAPTURE RESOLUTION:
The map objects are only accurate to the resolution at which they were captured. Output scale is not indicative of data capture scale. Further information is available at: www.tailte.ie, search 'Capture Resolution'

OUTPUT SCALE: 1:2,500

